

Crap & Win!
iPad Pro
 Check out our contest!
 suzuka.com.my/promotion | T&C Apply



ECES

EXPOSED
 CONCRETE
 EFFECT SYSTEM



WALL FINISH PROFESSIONALS
 TAIWAN • MALAYSIA • THAILAND



EDITION
3.1

**WALL FINISH
 PROFESSIONALS.**

SINCE
1977



BRICK & STONE VENEER • TEXTURED PAINT • WALL PANEL • ECES • TEXTURE COATING • PEBBLE STONE COATING



suzuka.com.my

Hotline : +6012-258 7388

* Photos of the products shown in this catalogue may vary in color due to lighting condition & printing. We suggest you examine actual product samples before ordering.



ECES-E3.1-2407



Advantages of ECES

SUZUKA® ECES is a **simple and durable** texture coating, suitable for both **interiors and exteriors**. It is **easily applied on-site** and is molded directly onto various types of surfaces, catering to the shape of your wall.

ECES requires very **minimal maintenance** and is only composed of **top quality ingredients** such as fluorocarbon resin. Also, ECES retains **strong resistance** against cracking, water seepage and rough weather conditions.

Furthermore, in staying true to the environment, ECES is **free of lead, mercury, acid and alkali**.


Choose from our selection of patterns and shades to bring the stark elegance of simple concrete to your home or office space.

ECES


EXPOSED CONCRETE EFFECT SYSTEM

Introducing ECES, Exposed Concrete Effect System. A texture coating that highlights the beauty of industrial modernity and minimalism.

Mirroring raw concrete in its original form, the simplicity of ECES complements various designs and atmospheres, on both interior and exterior surfaces.



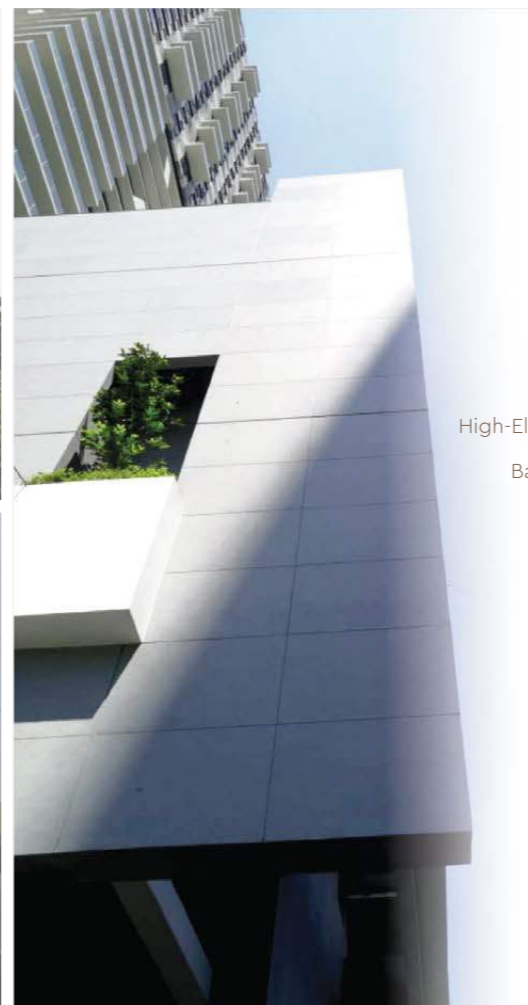


ECES Coating System

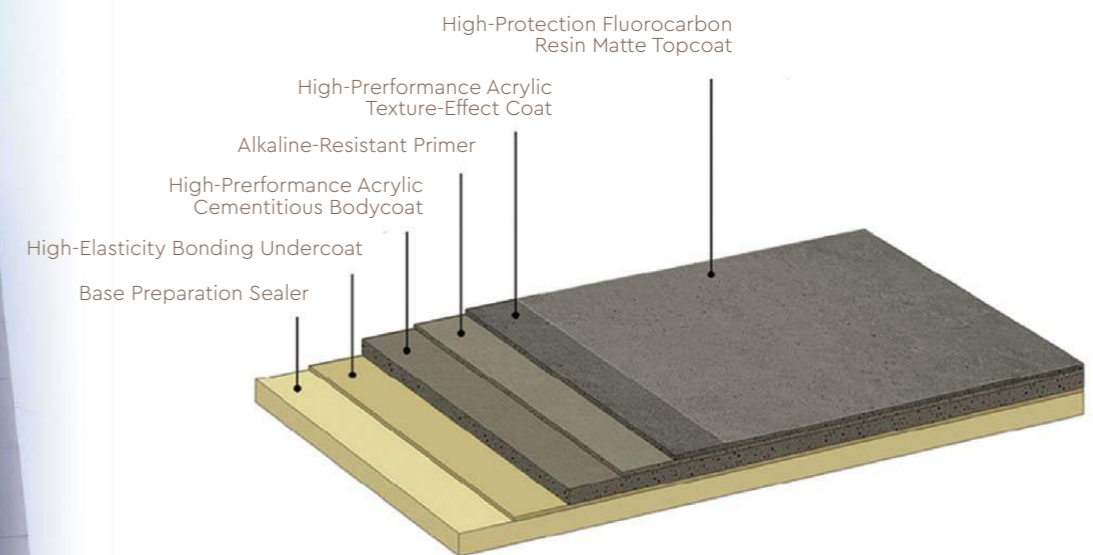

Coating system varies based on the type of design and existing surface.

Pre-cast Pattern

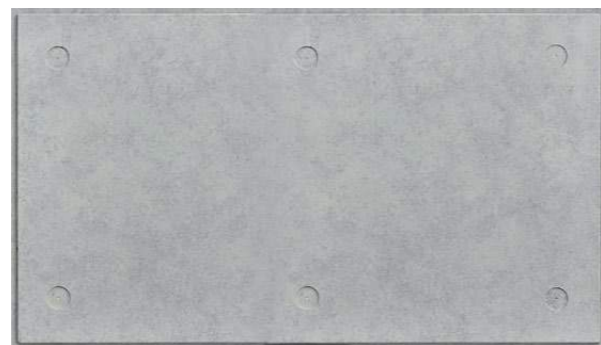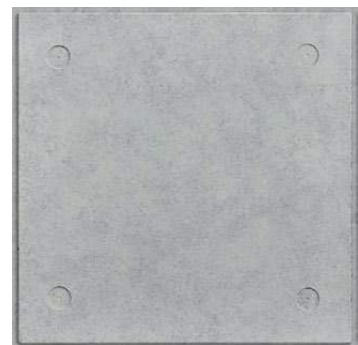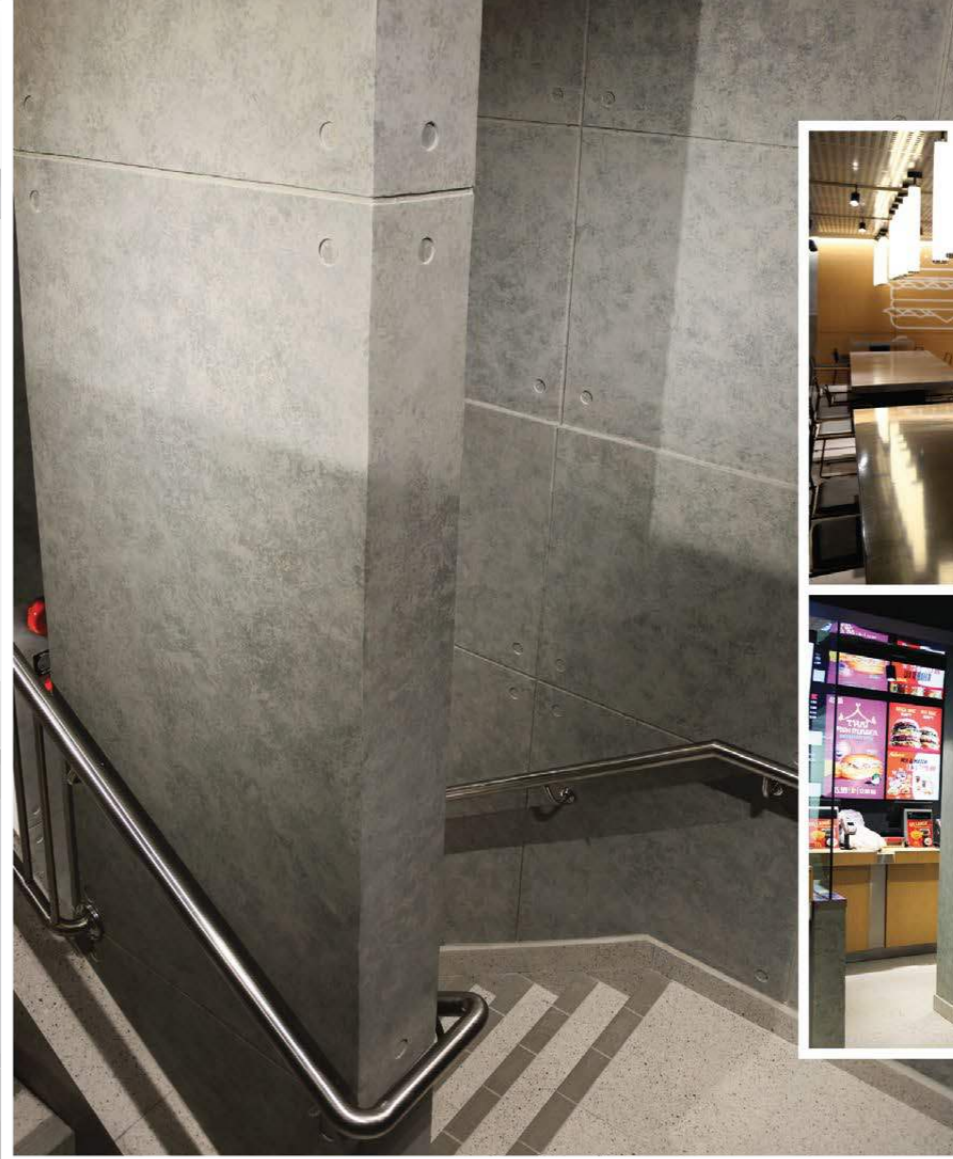

Pattern 1

Pattern 2





Pitted Effect

Pattern

Timber Pattern



IN MY ELEMENT

| in ' mī · 'eləmənt |
[phr.] To be where I am too happy to give a damn!



Colour Variations

A wide range of colours are available for customization, in addition to the ones shown.



Colour A



Colour B



Colour C



SUZUKA® ECES over Raw Concrete

Factors	ECES	Raw Concrete
Installation Ease	Simple	Complex
Installation Cost	Economical	Expensive
Material Cost	Economical	Expensive
Set-up Equipment	Basic	Requires extensive set-up
Applicable Surfaces	Unlimited	Limited
Customization	Unlimited	Limited
Durability	High	High

Applicable Surfaces

Type of Surface	Interior	Exterior
Cement Plaster	✓	✓
Painted substrates & Surfaces (with surface preparation)	✓	✓
Sand Boards (minimum 10mm thickness)	✓	✓
Plywood Boards (minimum 10mm thickness with primer)	✓	✗
MDF Boards (minimum 10mm thickness with primer)	✓	✗

SUZUKA®

WALL SEALER PRO

“ Make your wall finishes last longer! ”



Superior primer for concrete, skimmed or masonry surfaces.

This sealer that has good substrate penetration abilities to increase adhesion of product to prevent chalking or peeling off. It has excellent alkaline resistance properties that can prevent efflorescence. It is an ideal base coat for any SUZUKA® or any wall finish products.

Packing Size:

1L 5L 20L

Coverage

6.5 - 8.5 m²/l/coat

Drying Time (hour)

Surface Dry : 1 | Hard Dry : 5 | Recoating : 5
Substrate Temperature: 23°C - 26°C

Suitable for:

- Masonry wall
- Brickwork
- Plaster
- Skimmed Coat
- Asbestos free substrate

Features:

- Excellent alkaline resistance to prevent efflorescence.
- Good for new walls and repainting.
- Prevents skim coat from chalking & peeling off.
- Extremely good penetration.
- Excellent adhesion.
- Exterior and interior use.
- Applicable with brush, roller or spray gun.

Airless Spray

Nozzle 1.8 - 2.0 mm

Spray Angle Degree 65° - 80°

Pressure 210 psi/150kg/cm²